

ITEM NO.: EL-DI-H002, EL-DI-H004



EL-DI-H002, EL-DI-H004 is a distribution amplifier for HDMI signals. Both of them support 3D and resolution up to UHD 4K2K resolution. It reclocks and equalizes the signal and distributes it to two, four identical outputs.


EL-DI-H002 1 Input 2 4K2K Output HDMI Distribution Amplifier

- Connects up to 2 HDMI displays at the same time from a digital video source.
- Support up to 3D, 4Kx2K UHD, 12-Bit deep color.
- Built in EDID learning/integration function.
- Support LPCM 7.1, Dolby TrueHD, DTS-HD Master Audio.
- Bandwidth: 25~340 Mhz.
- HDMI 1.4a compliance, HDCP complaint.
- DVI 1.0 compliance.


EL-DI-H004 1 Input 4 Output 4K2K HDMI Distribution Amplifier

- Identical to EL-DI-H0022K, but 4 HDMI displays at the same time from a digital video source.

Installation View:

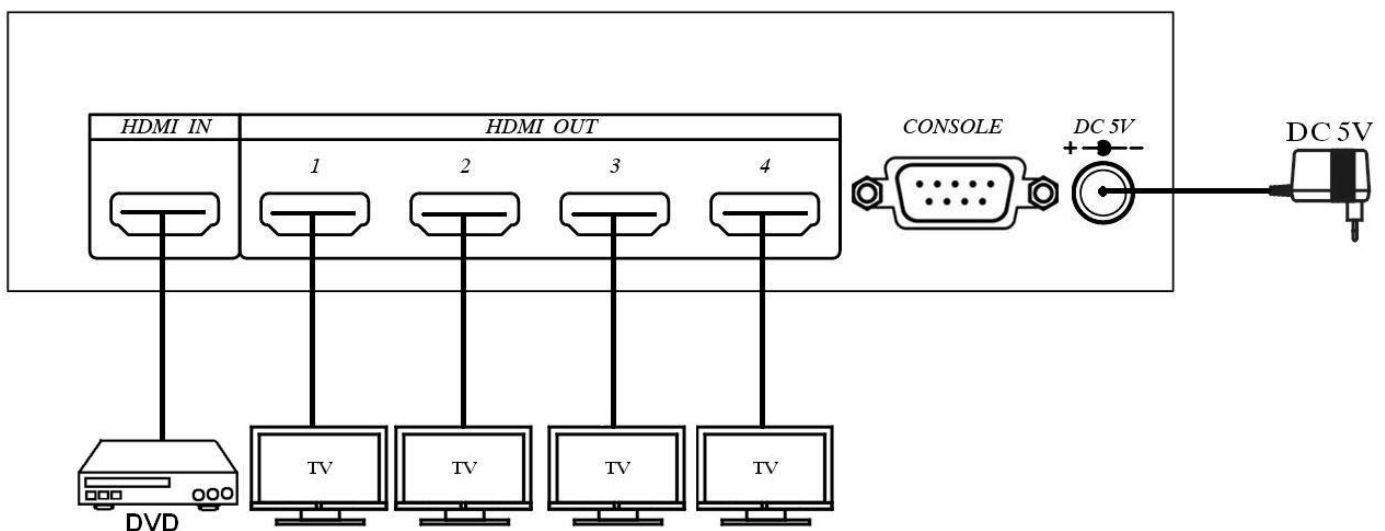


**PANEL VIEW:
EL-DI-H002**

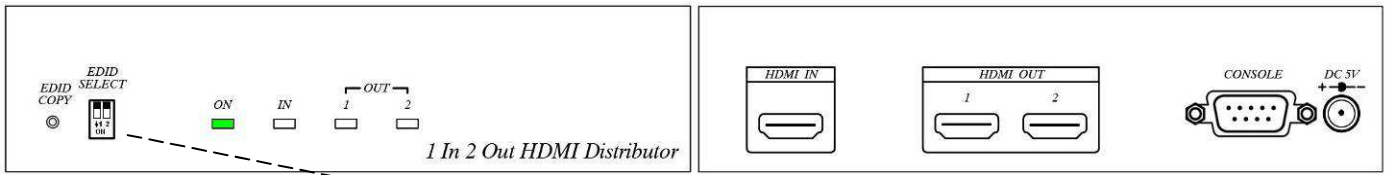

EL-DI-H002 LED Indication :

POWER	Green on:	Power on
INPUT	Blue on:	HDMI Input
OUTPUT1	Blue on	HDMI output 1
OUTPUT2	Blue on	HDMI output 2


→DIP Switch for EDID



EL-DI-H002 DIP Switch instruction:

- Switch 1~2 OFF: Default as EDID 1080P.
- Switch 1 ON: Output 1 as EDID source.
- Switch 2 ON: Output 2 as EDID source.
- Switch 1~2 ON: EDID Analysis and re-generate a set of EDID for all screen resolution.


EL-DI-H004

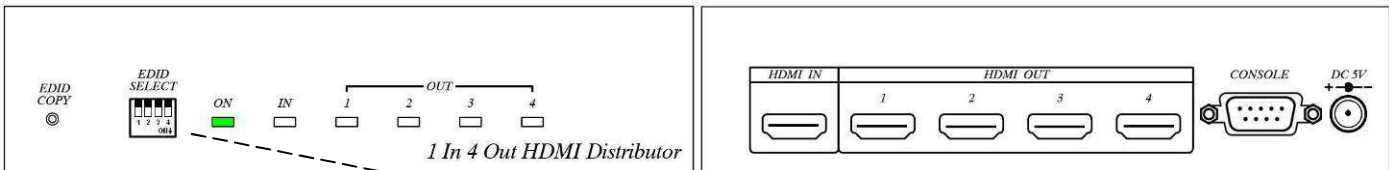

EL-DI-H002 LED Indication :

POWER	Green on:	Power on
INPUT	Blue on:	HDMI Input connected
OUTPUT1	Blue on:	HDMI output 1 connected
OUTPUT2	Blue on:	HDMI output 2 connected
OUTPUT3	Blue on:	HDMI output 3 connected
OUTPUT4	Blue on:	HDMI output 4 connected

DIP Switch for EDID



EL-DI-H004 DIP Switch instruction:

- DIP Switch 1~4 OFF: Default as EDID 1080P
- Switch ON 1: Output 1 as EDID source.
 - Switch ON 2: Output 2 as EDID source.
 - Switch ON 3: Output 3 as EDID source.
 - Switch ON 4: Output 4 as EDID source.
 - Over 1 DIP switch ON: EDID analysis and re-generate a set of EDID for all screen resolution.

※ Examples : Output 1,2 are different resolution screen, move the DIP switch 1, 2 at ON position, press " EDID COPY" button, then re-generate a new a set of EDID to support both two monitors screen resolution.

EDID COPY Button Instruction :

Press "EDID COPY" button, start to learning and writing EDID.

Remark : Over 2 port EDID learning, audio will only support two channel audio.

Console Port:

R232 interface connect to PC for firmware updated

Specification:

ITEM NO.	EL-DI-H002	EL-DI-H004
Resolution	480p · 576i · 720p · 1080i · 1080p 60Hz · 4K x 2K 30Hz	
HDMI Connector	Input: 1 port (HDMI Type A), Output: 2 port (HDMI Type A)	Input: 2 port (HDMI Type A), Output: 4 port (HDMI Type A)
Console	RS232 x 1 (use for firmware update)	
DIP Switch	25-225Mhz, support up to 12-Bit deep color	
Function button	Button x 1	
Power Supply	DC5V 2AMP	
Temperature	Operation: 0 to 60°C, Storage: -20 to 85°C, Humidity: up to 95%	
DIMENSIONS	mm	167 x 100.5 x 40
Weight	g	445



Rev. A



Elpro Video Labs srl Str. della Pronda 45B 10142 Torino - Italy Tel. +39 011 770 1583
www.elprovideolabs.com info@elprovideolabs.com