




## 18Gbps 4x4 Matrix Switch AC-MX-44

The AC-MX-44 is a 4x4 HDMI matrix switch that supports HDMI 2.0(a/b), HDCP 2.3, up to 4K video resolution, and up to 18Gbps bandwidth. Audio Delay is “On-Board” so integrators can manage lip-sync issues before they become a problem. Video signal management is also possible with built-in scalars. In addition to scalars, this matrix supports complete EDID management, allowing maximum flexibility with today’s broad range of sources and displays. The AC-MX-44 also features the AVPro Edge User Interface (AEUI). We built the AEUI from scratch for our integrators with the technology they requested.

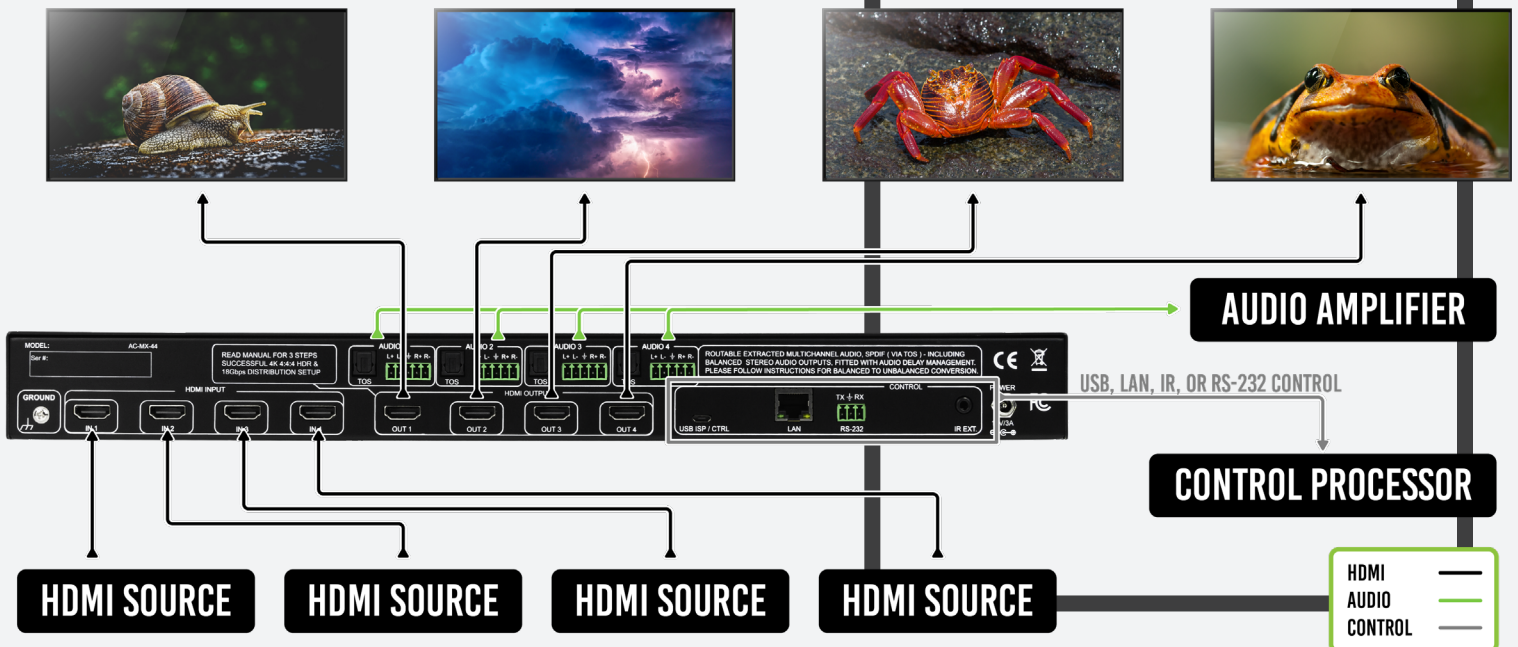

# PRODUCT SPECIFICATIONS

VIDEO:	
VIDEO RESOLUTIONS	UP TO 4K 60HZ 4:4:4
VESA RESOLUTIONS	UP TO DCI 4K (4096X2160)
HDR FORMATS/RESOLUTIONS	420, 422, 444 (10 AND 12 DEEP COLOR) HDR10, HDR10+, DOLBY VISION, HLG
COLOR SPACE	YUV (COMPONENT), RGB (CSC: REC. 601, REC. 709, BT2020, DCI, P3 D6500)
CHROMA SUBSAMPLING	4:4:4, 4:2:2, 4:2:0 SUPPORTED
DEEP COLOR	UP TO 16 BIT (1080), UP TO 12 BIT (4K)
SCALERS (HDMI) PER OUTPUT OPTIONAL	4K TO 1080P DOWN-SCALING (RESOLUTIONS ONLY, FRAMERATE STAYS THE SAME), AND 4:4:4 TO 4:2:0
AUDIO:	
AUDIO FORMATS SUPPORTED HDMI	PCM 2.0 CH, LPCM 5.1 & 7.1, DOLBY DIGITAL, DTS 5.1, DOLBY DIGITAL PLUS, DOLBY TRUEHD, DTS-HD MASTER AUDIO, DTS-X, DOLBY ATMOS
AUDIO FORMATS SUPPORTED EXTRACTED (TOSLINK)	PCM 2.0 CH, LPCM 6 CH, LPCM 7 CH, DOLBY DIGITAL, DOLBY DIGITAL PLUS, DTS- MASTER AUDIO
AUDIO FORMATS SUPPORTED EXTRACTED (2CH PORT)	PCM 2CH
AUDIO EXTRACTION LOCATION	BIND TO INPUT, BIND TO OUTPUT, OR MATRIX (INDEPENDENT)
AUDIO DELAY (PER OUTPUT, EXTRACTED)	UP TO 630MS
DISTANCE:	
HDMI IN/OUT (4K60 4:4:4)	UP TO 50 FEET (USING BULLET TRAIN HDMI)
HDMI IN/OUT (W/ AOC CABLE) (4K60 4:4:4)	UP TO 130 FEET (USING BULLET TRAIN AOC)
OTHER:	
BANDWIDTH HDMI	18 GBPS UNCOMPRESSED
HDCP	HDCP 2.3 AND EARLIER
CONTROL:	
PORTS	LAN, RS232, IR
DRIVERS	C4, RTI, ELAN, CRESTRON, URC (SEE DRIVERS PAGE ON AVPROEDGE.COM/DRIVERS)
LAN WEBUI	YES
PORTS:	
HDMI	TYPE A
LAN	RJ45 W/ WEB INTERFACE/ CONTROL
AUDIO (EXTRACTED DIGITAL)	TOSLINK
AUDIO (EXTRACTED ANALOG)	5 PIN TERMINAL BLOCK (BALANCED)
IR EXT	3.5MM STEREO (3 CONDUCTOR)
RS232	3 PIN TERMINAL BLOCK
ENVIRONMENTAL:	
OPERATING TEMPRATURE	23 TO 125°F (-5 TO 51°C)
STORAGE TEMPERATURE	-4 TO 140°F (-20 TO 60°C)
HUMIDITY RANGE	5-90% RH (NO CONDENSATION)
POWER:	
POWER CONSUMPTION (TOTAL)	30 WATTS MAX
POWER SUPPLY - MATRIX	INPUT: AC 100-240V ~ 50/60HZ OUTPUT: DC 12V 5A
DIMENSIONS:	
DIMENSIONS (UNIT ONLY - HEIGHT/DEPTH/ WIDTH)	MM: 44.45 X 225.43 X 438.15 INCH: 1.75 X 8.875 X 17.25
DIMENSIONS (PACKAGED HEIGHT/DEPTH/ WIDTH)	MM: 88.9 X 336.55 X 495.3 INCH: 3.5 X 13.25 X 19.5
RACK UNITS	1 UNIT
WEIGHT (UNIT)	6.2 LBS (2.81 KG)
WEIGHT (PACKAGED)	8.32 LBS (3.78 KG)
*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. MASS & DIMENSIONS ARE APPROXIMATE	

Our best developers have been hard at work bringing our integrators an easy-to-use web based user interface that allows them to set up, troubleshoot, and control this 4K 4x4. The AVPro Edge user interface (AEUI) allows for easy configuration and sets up the 4K 4x4. This matrix switcher also comes with a screen on the unit that can tell you the IP address for connecting directly to your control system. From built-in scaling to complete EDID control and configuring, you can customize every aspect of this device to work perfectly for your system.

## FULL FEATURE SET

- HDMI 2.0(a/b)
- 18Gbps Bandwidth Support
- 4K60 4:4:4 Support
- Full HDR Support (HDR 10 & 12 Bit)
- Dolby Vision, HDR10+ and HLG Support
- HDCP 2.3 (and all earlier versions supported)
- 4K > 1080p Down Scalers on each output
- Advanced EDID Management
- IR, RS-232 and LAN Control Options
- Digital Toslink Out (7CH PCM, DD, DTS)
- Balanced Analog Out (2CH PCM)
- Audio Delay for Digital & Analog Out
- HDBaseT Compatibility mode for mixed systems
- Driver Support For Crestron, C4, RTI, ELAN and more
- Extracted Audio Now Has 3 Operating Modes. Bound to Input, Bound to Output, or Independent Matrix
- Built in Test Pattern on Each Output to Verify Infrastructure

