




SCP PART#: 22/2ESH-LSZH

UPC: 817777013115

DESCRIPTION:

BALANCED AUDIO CABLE - LOW SMOKE ZERO HALOGEN- 2C/22AWG (7/30) STR TC TP BK/RD, SHIELD W/DRAIN, EN50575, Dca-s1,d1,a1 LSZH JKT - GRAY- 305M/1000FT BOX

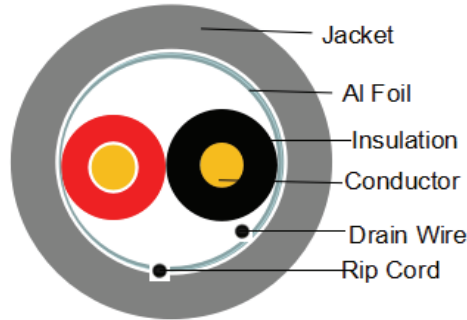

Standard: EN50575 REACTION TO FIRE: CLASS Dca-s1,d1,a1
EU RoHS 2011/65/EU Compliant

Construction Characteristics:

| | | |
|-------------|----------------|------------------------|
| Conductor | Material | Stranded Tinned Copper |
| | Size | 22AWG X 2C |
| | Construction | 7/0.25+/-0.004mm |
| Insulation | Material | HDPE |
| | Min.Thickness | 0.228mm |
| | AVG.Thickness | 0.25mm |
| | Diameter | 1.27+/-0.05mm |
| Shield | Colors | Black & Red |
| | Drain wire(TC) | 7/0.25+/-0.004mm |
| Jacket | Shield | AL Foil |
| | Material | LSZH |
| | Min.Thickness | 0.72mm |
| | AVG.Thickness | 0.80mm |
| | Diameter | 4.30+/-0.20mm |
| | Rip Cord | Nylon |
| Bend radius | Color | Gray |
| | Min 15D/65mm | |

Electrical & Physical Characteristics:

| | | | |
|--|------------------------|------------|---------------------|
| Operating Temperature Range | - 20°C + 75°C | | |
| Conductor Resistance(22AWG) | Max 53.5ohm/km at 20°C | | |
| Dielectric Strength | Min AC1.5KV | | |
| Rated Voltage | Max 80Volts | | |
| Impedance: | 45±5 OHM | | |
| Capacitance:conductor-conductor | 35±3 pf/ft | | |
| Capacitance:conductor-conductor to shield | 67±3 pf/ft | | |
| Marking: | | | |
| STRUCTURED CABLE PRODUCTS --- 22/2ESH-LSZH --- 2C/22AWG TC AL FOIL+DRAIN -- LOW SMOKE ZERO HALOGEN -- EN50575 CE Dca EU RoHS EC ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M | | | |
| Packaging: | | | |
| Approx.Weight | Approx.Dimension(mm) | Package | Packages per pallet |
| 8.7kgs/19.180lbs | 320X260X320 | 1000ft/Box | 48/36 |